


# CORITEC

# RC/RD

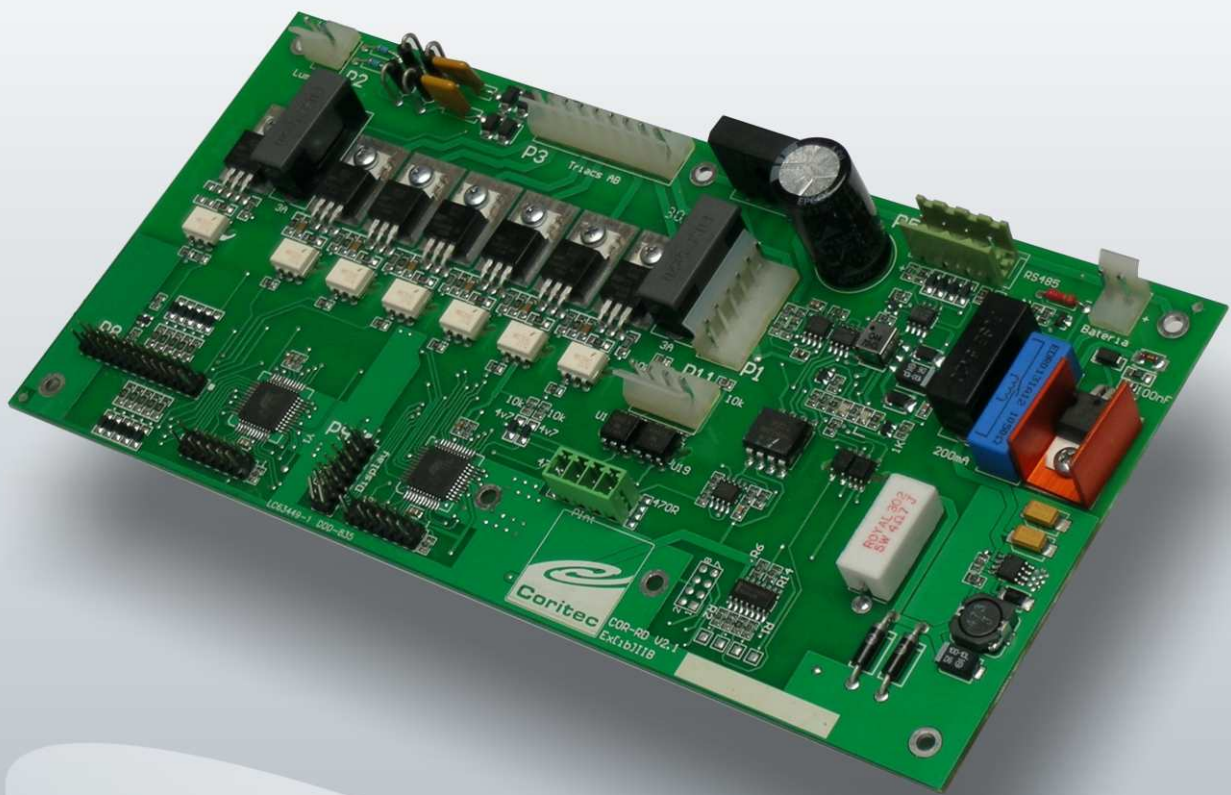

## CNG Dispenser Controller

## Technical features

Inputs	Keypad Pressure switch Hose in dock signal
Outputs	Compatible with many existing displays 24VCA solenoid valves End of dispatch indicator (light and sound)
Features	Fraud Detection Self Diagnosis Totalizer Safe-Save without battery In-Field Firmware Update Menu access restriction by hardware
Meter interface	Pulses
System interface	RS-485, MODBUS, CORITEC Protocol
Gas lines	1, 2 or 3 lines
Power supply	24 VAC +/- 10%
Battery	12V 800mAh
Dimensions	235 x 110 x 30 mm
Weight	0.170 Kg
Classification	Ex ib IIB

The COR-Rx controller has the inputs and outputs that are necessary for a standard CNG dispenser. It is able to simultaneously and independently operate with 2 filling hoses. It is designed to replace most of the existing controllers in the market, thus allowing a simple update for the dispenser to match today's operating and communication requirements. The remote monitoring capabilities and anti-fraud characteristics make this controller an excellent ally in every day use.



**CORITEC s. r. l.**

Yatay 146/148 (1184 ADB)  
Buenos Aires - Argentina

Tel.: + 54 11 4981-6437  
Tel.: + 54 11 4981-5742  
www.coritec.com  
e-mail: info@coritec.com.ar